

HERO PM Sheet

CUSTOMER INFORMATION			
Customer:			Email:
Address:			Phone:
City:	State:	Zip:	Contact:

MACHINE INFORMATION	
Serial #:	Hour Meter (<i>Key</i>):
Model #:	Hour Meter (<i>Traction</i>):
Work Order #:	Hour Meter (<i>Scrub</i>):
Recharge #:	Hour Meter (<i>Vacuum</i>):


NOTE: EDGE Isolators need to be replaced on Auto Scrubbers at 1,000 hours, or annually – whichever comes first.

CLEAN & INSPECT	IN SPEC	REPAIR	PROBLEM
Drain / Rinse Recovery Tank			
Drain Hose & Plug			
Drain / Flush Solution Tank			
White Vacuum Box Filter			
Vacuum Float Ball Screen			
Drain Saver Basket			
Recovery Tank Lid & Gasket			
Solution Filter(s)			
Solution Fill Screen			
Remote Hoses			
Squeegee Blades / Flip To New Edge			
Squeegee Wheels			
Squeegee Blade Retainers & Hardware			
Vacuum Hoses			
Drive Wheels & Casters Condition			

CLEAN & LUBRICATE	IN SPEC	REPAIR	PROBLEM
Squeegee Pivot Points & Knobs			
Grease Caster Swivel			

NOTE: Tip Tank Back

BATTERY #1	HYDROMETER READING	WATER CLARITY (Circle One)	WATER LEVEL (Circle One)
Cell A		Clear Dark	Overfilled Full Low
Cell B		Clear Dark	Overfilled Full Low
Cell C		Clear Dark	Overfilled Full Low
BATTERY #2	HYDROMETER READING	WATER CLARITY (Circle One)	WATER LEVEL (Circle One)
Cell A		Clear Dark	Overfilled Full Low
Cell B		Clear Dark	Overfilled Full Low
Cell C		Clear Dark	Overfilled Full Low
BATTERY #3	HYDROMETER READING	WATER CLARITY (Circle One)	WATER LEVEL (Circle One)
Cell A		Clear Dark	Overfilled Full Low
Cell B		Clear Dark	Overfilled Full Low
Cell C		Clear Dark	Overfilled Full Low
BATTERY #4	HYDROMETER READING	WATER CLARITY (Circle One)	WATER LEVEL (Circle One)
Cell A		Clear Dark	Overfilled Full Low
Cell B		Clear Dark	Overfilled Full Low
Cell C		Clear Dark	Overfilled Full Low

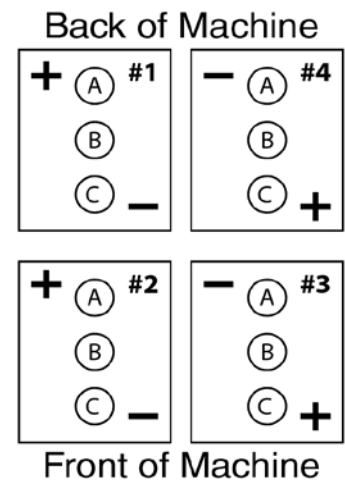

HERO PM Sheet

CLEAN & LUBRICATE	IN SPEC	REPAIR	PROBLEM
Scrub Deck Linkage Pivot Points			
Black Unloader Valve			
Blue Vac Muffler Drain Hose			
Scrub Motor Wires			
Brush Deck Skirts			

BRUSH CONDITION			
Scrub Brush Fiber Length	Brush 1 Length:	Brush 2 Length:	Rotated Brushes: Y / N
Female Brush Sockets: (2-Disk)/(4-Cyl)	Good	Worn	Needs Replacement
Male Hubs: (2-Disk)/(4-Cyl)	Good	Worn	Needs Replacement
EDGE Pad Grip Face	Good	Worn	Needs Replacement
Disk Pad Driver	Good	Worn	Needs Replacement

ZERO3 SYSTEM	IN SPEC	REPAIR	PROBLEM
Replace Air Dryer			
Clean / Descale Injector w/ Vinegar			

SUDS SYSTEM	IN SPEC	REPAIR	PROBLEM
Drain Suds Reservoir			
Rinse out Suds Reservoir & Plumbing 10 mins			

CHECK OPERATION & CONDITION OF	IN SPEC	REPAIR	PROBLEM
Key Switch			
LCD Display			
Page Button			
Brush Pressure & Solution +/- Toggle			
Managers Lock Out(s)			
Reverse & E-Stop Switch			
Battery Charger Connectors & Function			

NOTE: Fill Solution Tank Before Continuing

CHECK OPERATION & CONDITION OF	IN SPEC	REPAIR	PROBLEM
Brush Switch			
Brush Deck Lift System			
Pitch of Scrub Deck (Must be level)			
Solution Solenoid Valve			
Solution Output			
Brush Motors			
Vacuum Switch / Squeegee Lift			
Vacuum Performance / Red Light @ 40"			
Green Drive Button / Throttle "Speed Pot"			
Squeegee Adjustment – Pitch & Height			
Spray Jet/Wand Pump, Hose, & Nozzle			

COMMENTS

Servicing Distributor:		
Technician's Name:	Date:	Signature:
Customer's Name:	Date:	Signature: